Experiment 2: Instrumentation and Oscilloscope Introduction

Part 1: Multimeter, Ammeter and Breadboards

In this lab we will become familiar with three instruments that you will use throughout the semester: the Ammeter, the Multimeter and \Breadboards". An ammeter is a device used to measure the current, that is the the ow of electric charge in a conductor. The SI unit of current is the Ampere (or \Amp"): 1 Ampere = 1A = 1 coulomb per second. The ow of current is determined by the resistivity of the conductor, and a device that assigns a speci c resistance in a circuit is called a resistor (R).

A typical breadboard is made up of two areas: Terminal Strips and Bus Strips. Terminal strips are the main areas of the breadboard and hold most of the electronic components of the circuit, such as the resistors. The terminal strips are separated by a notch (indicated by the green line in Fig. 2b) that runs parallel through the middle of the breadboard, usually along the long side. The contact points on the left and right side of the notch are connected in a radial pattern of rows, with ve points in an individual row being electrically connected. The columns of the contact points on the right and left sides of the notch are labeled (from right to left) A through E and F through J, respectively.

The Bus Strips provide power to the circuit components. They consist of two parallel columns (labelled in Fig. 2b) running down both the left and right sides. Each column is electrically connected. \Jump wires" are used to transfer signals from the Bus strips to the main terminal strips.

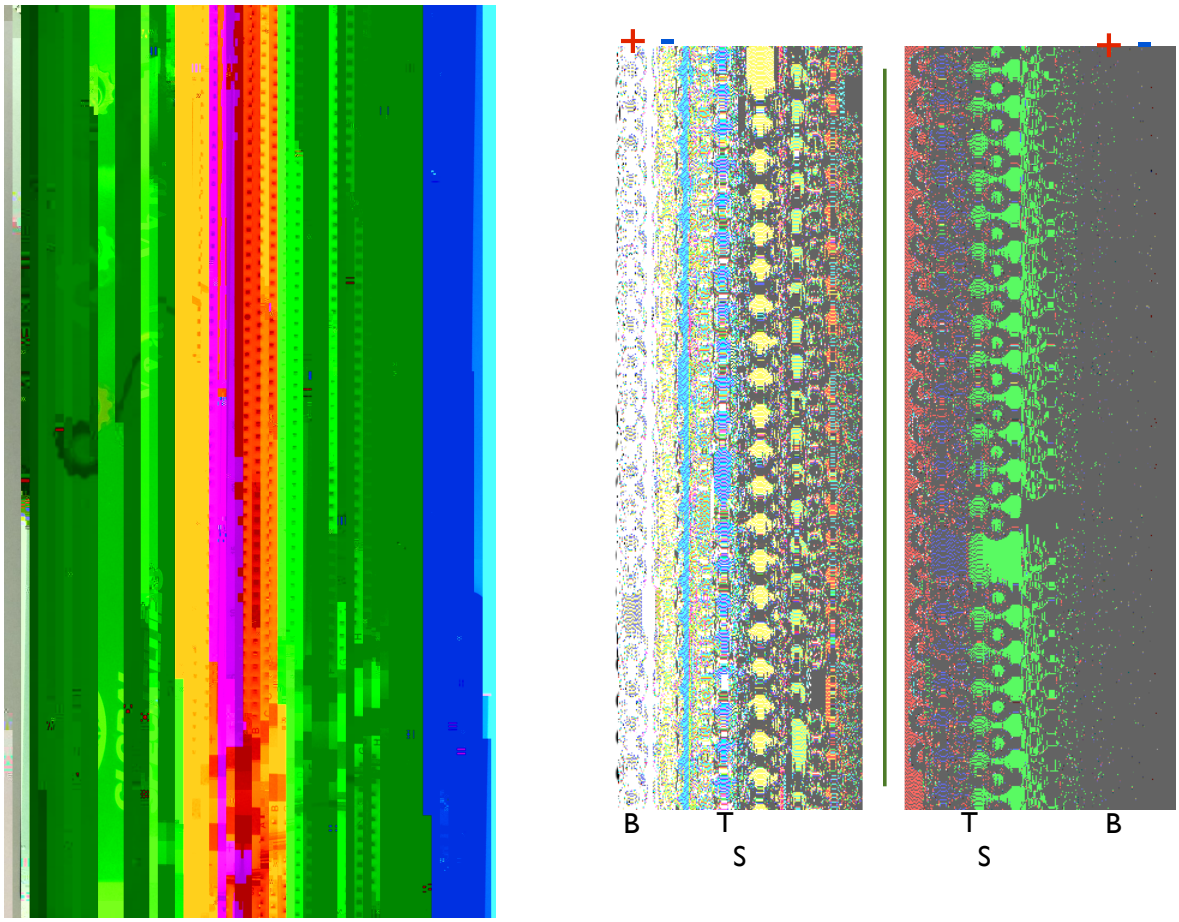

(a) (b)

Figure 2: (a) A simple breadboard used in the lab. (b) Breadboard schematic outlining the contact points in detail.

Part 1 Procedure: Before beginning, it is important to mention some safety and measuring rules.

Part 2: Introduction to the Oscilloscope

Using an oscilloscope is an extremely useful skill, so it is important that you have the time to study the instrument alone, without having to worry about other additional physical concepts in an experiment as well. Although this portion of the experiment looks lengthy, the procedure is very basic, straightforward, and short. The following is a detailed description of most of the functions and features of an oscilloscope. It would be ideal to read the section carefully before coming to laboratory, and then go through the

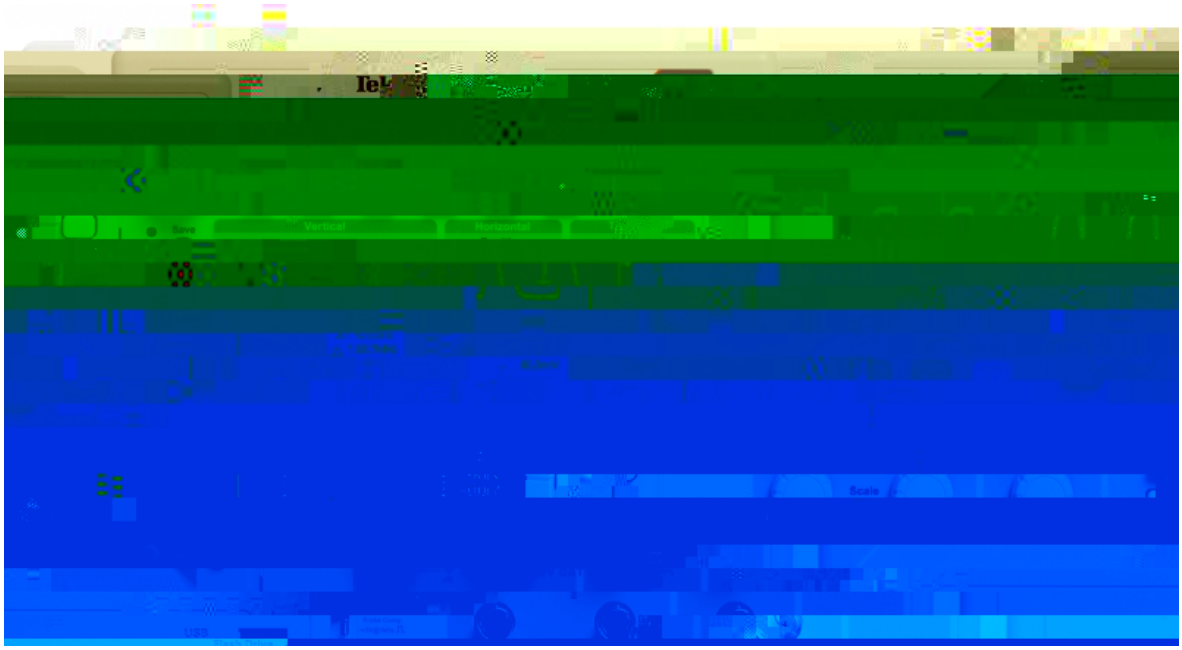

Figure 4: A sample oscilloscope - Tektronix TDS 2002C model used in class.

Part 2 Procedure: We will acquaint ourselves with the oscilloscope front panel controls, and then make some observations. We will observe a DC voltage signal from a power supply, and an AC voltage signal from a function generator.

1. With nothing connected to the front of the oscilloscope, nd the power switch and turn it on. Wait

5. Turn o the CH1 waveform display and make sure CH2 is still on. Set the power supply to 2 V and adjust the CH2 vertical scale knob setting until a line appears on the screen. Use the CH2 POSITION knob to move the \2" at the left of the screen to the middle of the display; note that a status line appears at the very bottom of the display telling you how far o you are. Find the VOLTS/DIV setting that positions the signal at the rst grid line above the center line. Now slowly increase the voltage output on the power supply to 5 V. What happens to the line on the screen? Change the vertical scale settings (VOLTS/DIV settings) in both directions and describe what happens. Also, adjust the vertical position setting accordingly in order to view the CH2 signal.

6. Oscilloscopes have two coupling modes, AC and DC. Oscilloscopes are normally operated in DC-coupled mode, allowing you to see the exact voltage on the screen. AC-coupling removes all the DC components of the waveform, centering the wave on the zero volts making it easier to see any ne details of the waveform. Sometimes you may want to see a small AC signal, perhaps electrical